

Elevator Technology

thyssenkrupp Elevator (India) Pvt. Ltd.

Head Office
1007, Windfall, Sahar Plaza
J.B. Nagar, Andheri (E)
Mumbai, Maharashtra - 400059
T: (+91) 22 40429429
Toll free number: 1800 102 8500
in.info@tkeap.com
www.thyssenkrupp-elevator.co.in

North Zone Office
429, Functional Industrial Estate
Patparganj, New Delhi
Delhi - 110092
T: (+91) 11 41770200

East Zone Office
Malik Court, 3rd Floor
39A, Harish Mukherjee Road
Kolkata, West Bengal - 700025
T: (+91) 33 71739000

West Zone Office
401, The Orion Building
5 Koregaon Park Road
Bundgarden, Pune
Maharashtra - 411001
T: (+91) 20 26139610

Mumbai Zone Office
A-24, Vardhan House
Street No. 3, M.I.D.C. Andheri (E)
Mumbai, Maharashtra - 400093
T: (+91) 22 66902300

South Zone - 2 Office
No. 18, (CITB No. 127)
11th Main Road, 33rd, Cross Road
4th Block East, Jayanagar
Bangalore, Karnataka - 560011
T: (+91) 80 41369400

South Zone - 1 Office
5/84-1, 2nd Floor
Mount Poonamalee Road (Butt Road)
St. Thomas Mount, Chennai
Tamil Nadu - 600016
T: (+91) 44 49050200

engineering.tomorrow.together.

Elevator Technology

Evolution 1

Proven MRL Performance



thyssenkrupp



thyssenkrupp moves people – the future of urban mobility.

In 40 short years, we've become one of the world's leading elevator companies with unique engineering capabilities, offering next-generation solutions like MULTI, the ropeless elevator, ACCEL, an accelerated people mover, and MAX, a cloud-based predictive maintenance service. Whether building a new state-of-the-art system or optimizing and modernizing existing ones, our solutions deliver crucial energy and time efficiencies, helping to address the challenges of urbanization and transform cities into the best places to live.

Customers in **150** countries

Over 900 sales and service locations

Sales of **€ 7.5** billion

50,000+ employees

A trusted partner

We support our customers throughout their project lifecycle, from the design to the end-of-life phase. Every step of the way, we strive to fully understand their needs and consistently deliver the safest, highest quality passenger transportation solutions, maintenance and modernization packages.

Through our internal technical support function, ITS (International Technical Services), thyssenkrupp trains its service technicians in a multibrand portfolio, enabling them to successfully service more than 1.2 million units under maintenance.

thyssenkrupp – the diversified industrial group

engineering.tomorrow.together – three words that describe who we are, what we do, and how we do it. Driven by global megatrends such as urbanization and the need for efficient use of environmental resources, our global community of more than 150,000 colleagues works together with our customers to harness our engineering expertise and strive for technological and business solutions that satisfy the demand for “more” in a “better” way.

Find out more: www.thyssenkrupp.com



One World Trade Center



Makkah Clock Tower / Source © SL Rasch

- We provide smart and innovative products for a wide variety of applications:
- Passenger and freight elevators
 - Escalators and moving walks
 - Passenger boarding bridges
 - Stair and platform lifts
 - Customized service and modernization solutions



Mercedes Benz



thyssenkrupp Quartier

engineering.
tomorrow.
together.

thyssenkrupp Elevator India

Established in 2002, thyssenkrupp Elevator (India) installs, maintains and modernizes elevators and escalators in India and Bangladesh. We have a strong presence in various segments, such as residential, office and infrastructure. We are committed to working together to make cities the best places to live.





Evolution1

Proven MRL performance

Being a machine room-less (MRL) elevator, Evolution1 is ideal for mid-rise residential and commercial buildings with traffic, such as service elevators in shopping malls where escalators are used as the primary source of transportation.

Designed for

- Commercial buildings
- Mid-rise residential buildings
- Shopping malls

Specification

- Max. travel height: $\leq 110\text{m}$
- Max. number of floors: ≤ 32
- Rated speed: $\leq 2.0\text{m/s}$
- Rated load: $\leq 1600\text{kg}$
- Group control: 8

Proven MRL performance



Ride comfort

Sturdy car design, use of noise-reducing materials, and high precision motor system guarantee ride comfort.



Safe and reliable

Stringent product design based on thyssenkrupp German standards ensures highest degree of passenger safety.



Comfort and aesthetic design

Embrace aesthetic car interior design and comfort.

Ride comfort



- **Patented thyssenkrupp technology ensures a smooth ride.**

The independent suspension system keeps the car balanced. No additional acting force is required between the guide shoes and the rail, reducing friction and noise.

Hard-wearing polymer guide shoe lining with low coefficient of friction for a smooth ride and enhanced passenger comfort.

- **Continuous car load measurements ensure seamless braking and acceleration.**

A special weighing sensor continuously measures the car load and sends a signal to the control system to ensure a smooth ride.

- **Vibration isolation prevents vibrations from reaching the car interior.**

Rubber anti-vibration pad between the crosshead sheave and upper beam prevents vibrations on the sheave from affecting the car interior.

Moving anti-vibration pad between the car and the bottom of the car frame reduces noise and increases ride comfort.

Safe and reliable



thyssenkrupp based on its stringent German product design and safety standards is a trusted brand in the industry. thyssenkrupp is committed to ensuring the highest degree of passenger safety.

- **Training**

Our technicians are trained to work to the highest safety standards and adhere to stringent safety rules. thyssenkrupp's TEAMService and SEED Campus, the thyssenkrupp Elevator training institution, assures that our team is continuously and systematically trained to deliver the services you depend on.

- **Solutions**

Our unique field operations system, VIEW, stores every elevator's service history, enabling us to see the performance of the units in real time, and monitor the leading indicators that optimize equipment availability.

- **Design**

Stringent global product design standards and cutting-edge technology ensure the highest levels of passenger safety.



Installation

thyssenkrupp's reputation for customer-centric solutions has come about through our focus on providing solutions to design, select and install people transportation systems for a wide variety of buildings.

- **Systematic project management**

Utilize mobility devices to provide real-time project management and reporting to ensure timely installation.

- **Professional installation**

Utilize vigorous process to select installation teams. Staff are graded on 7 levels. Installation teams are regularly trained and put through stringent tests to qualify them on proven methodology.

- **Comprehensive quality control system**

In-process checks and quality assurance to ensure qualitative and safe installation

Service

At thyssenkrupp, we are consistently committed to responding to customers' requests in a highly responsive, punctual and timely manner. Driven by a global service strategy, our business operating model contributes to all aspects of customer service satisfaction.

We adopt a proactive approach to go beyond our customers' expectations by providing tailored-made solutions to meet their needs. We strive to protect your investment by delivering a systematic service program of which is smart, stress-free and systematic.

- **Prescriptive maintenance**

Offered through a variety of service agreements that insure a consistent, proactive, and predictable process which you can rely on. Our team is trained to eliminate maintenance problems.

- **Smart tools**

Our network of engineers is well-equipped with intelligent tools to keep passengers moving.

- **Skilled team**

Every engineer is very well-trained to deliver quality work on time.



Comfort and aesthetic design

Evolution1 embraces comfort and aesthetic.

Comfort and aesthetic throughout your building

Designed for mid-to-high-end residential and commercial buildings, Evolution1's inspiring car interiors are designed with the building segment in mind. The feeling of comfort will continue from the lobby interior, into the elevator and therefor throughout the entire building.

Car interior

CS1-GE

Standard

Ceiling	RF-CL1S (Powder coated steel - RAL1015)
Side Wall	Powder coated steel - RAL1015
Rear Wall	Powder coated steel - RAL1015
Front Wall	Powder coated steel - RAL1015
Floor	PVC Floor - TCD314
Handrail	-



CS2-GE

Option

Ceiling	RF-CL1S (Powder coated steel - RAL7035)
Side Wall	Powder coated steel - RAL7035
Rear Wall	Powder coated steel - RAL7035
Front Wall	Hairline stainless steel - RAL7035
Floor	PVC Floor - CFL010
Handrail	-



Car interior

CS3-GEA

Option

Ceiling	RF-CL1S (Powder coated steel - RAL7035)
Side Wall	Hairline stainless steel
Rear Wall	Hairline stainless steel
Front Wall	Hairline stainless steel
Floor	PVC Patterned - PF001 (TCD319, TCD314)
Handrail	-



CL1-GE

Option

Ceiling	Starlight (Powder coated steel - RAL1015)
Side Wall	Powder coated steel - RAL1015
Rear Wall	Powder coated steel - RAL1015
Front Wall	Powder coated steel - RAL1015
Floor	PVC Floor - CFL008
Handrail	-



Car interior

CL2-GE

Option

Ceiling	Starlight (Powder coated steel - RAL7035)
Side Wall	Powder coated steel - RAL7035
Rear Wall	Mirror stainless steel
Front Wall	Powder coated steel - RAL7035 Mirror stainless steel
Floor	Powder coated steel - RAL7035
Handrail	-



CL3-GE


Option

Ceiling	Starlight (Hairline stainless steel)
Side Wall	Hairline stainless steel
Rear Wall	Hairline stainless steel
Front Wall	Hairline stainless steel
Floor	PVC Patterned - PF002 (CFL008, CFL006)
Handrail	-



Car Operating Panel (COP)

Standard	1
Type	COP S-A01
Indicator	Red dot matrix
Button	MT42
Optional	2
Type	COP S-B01
Indicator	Red dot matrix
Button	AN170
Optional	3
Type	COP S-A02
Indicator	5.7" Blue-white segment LCD
Button	MT42
Optional	4
Type	COP S-B02
Indicator	5.7" Blue-white segment LCD
Button	MT42

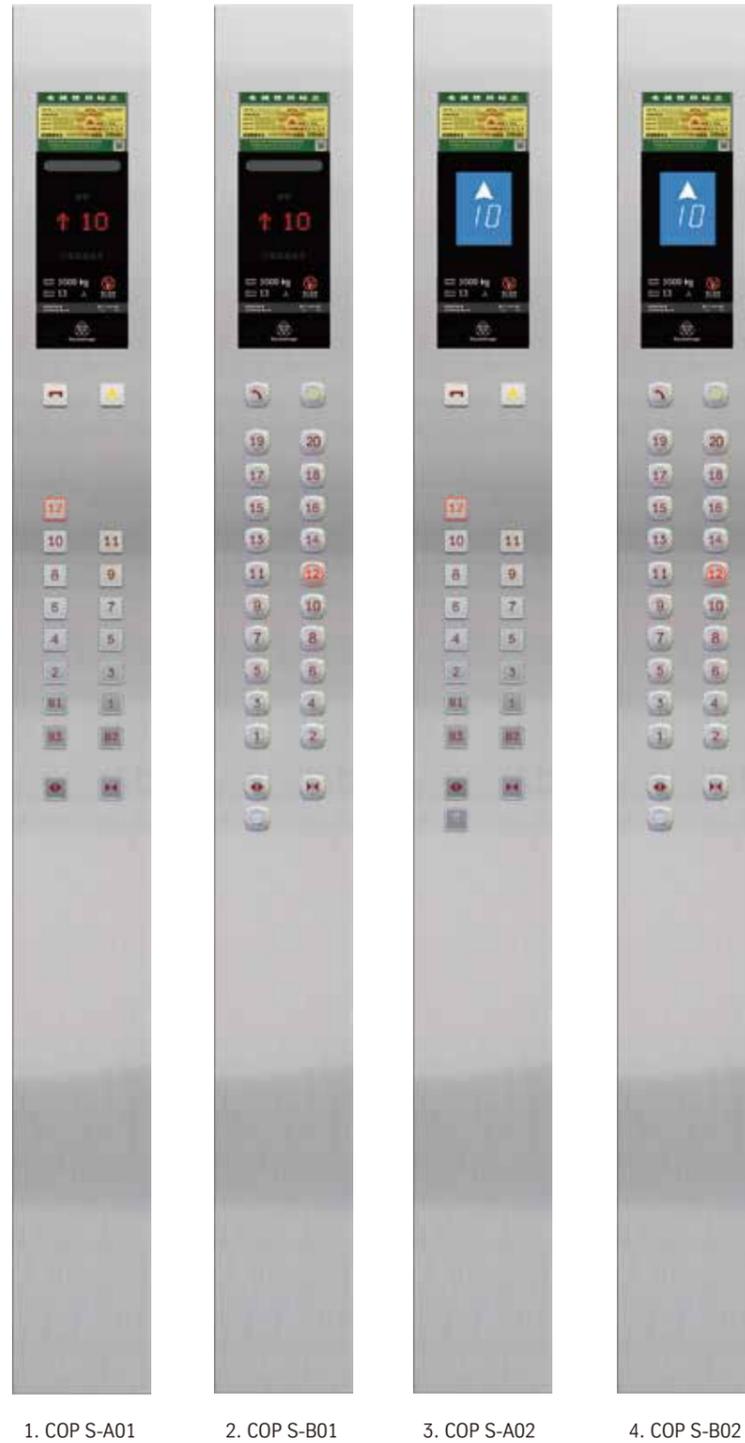


1. COP S-A01 2. COP S-B01 3. COP S-A02 4. COP S-B02

All thyssenkrupp products shipped on or after 1 October, 2016 will feature the new logo. Products shipped before this date will continue to use the old logo. Actual colours of the product may vary from the printed brochure. Due to the differences of the floor configurations and functions, the design of the operating panel may differ slightly.

Landing operating panel (LOP)

Standard	1
Indicator	Red dot matrix
Button	MT42
Firemen's switch	P-FS01
Optional	2
Indicator	Red dot matrix
Button	AN170
Optional	3
Indicator	4.3" Blue-white segment LCD
Button	AN170
Firemen's switch	A-FS01
Optional	4
Indicator	4.3" Blue-white segment LCD
Button	MT42

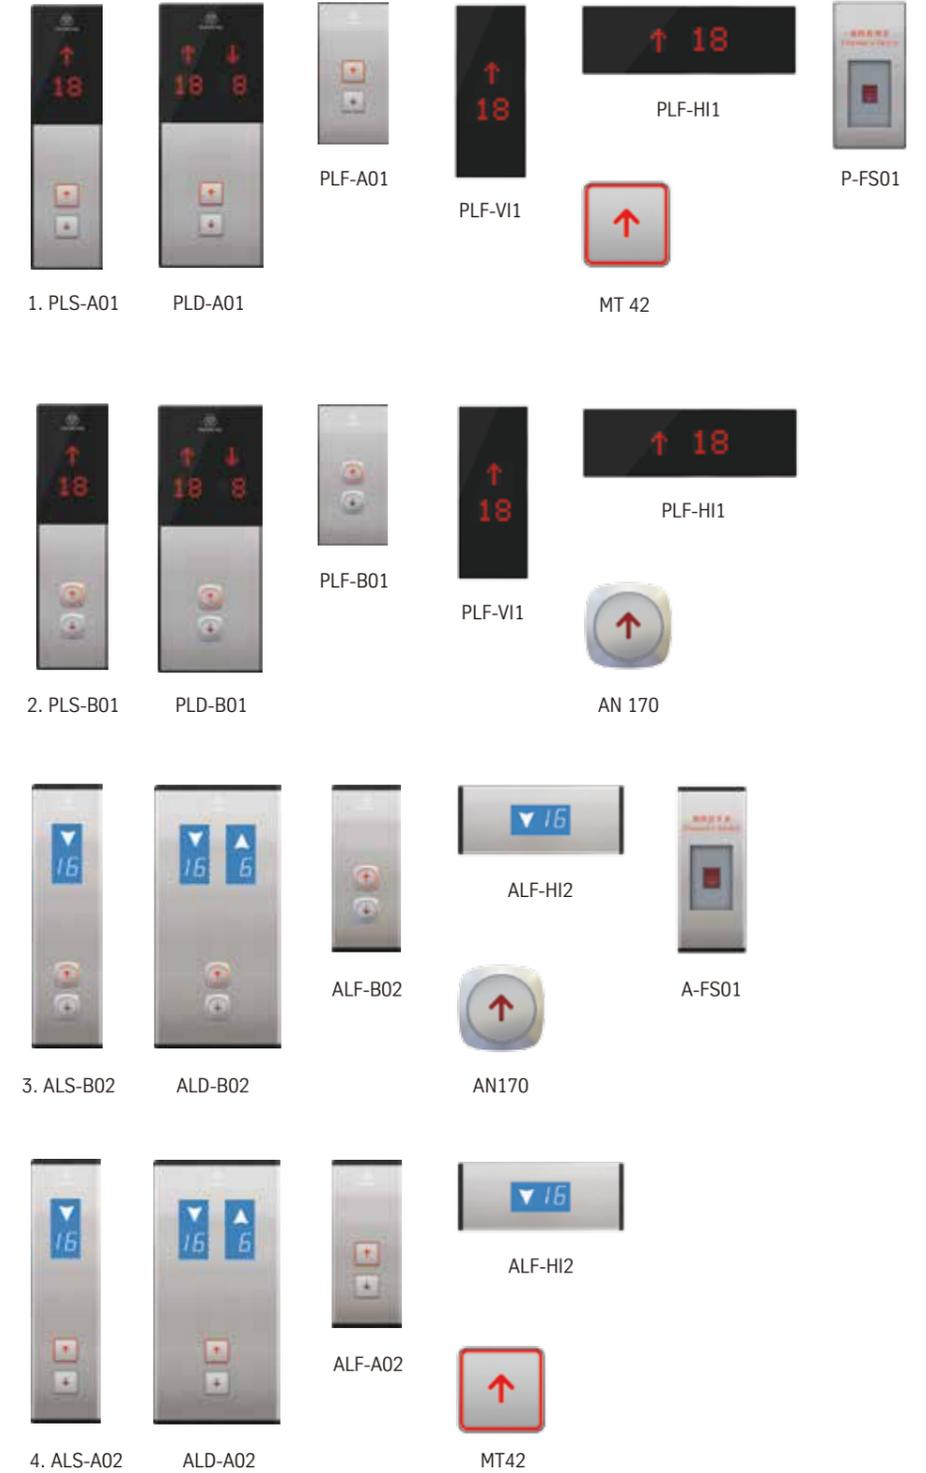

1. PLS-A01 PLD-A01 PLF-A01 PLF-VI1 PLF-HI1 P-FS01
 2. PLS-B01 PLD-B01 PLF-B01 PLF-VI1 AN 170 AN 170
 3. ALS-B02 ALD-B02 ALF-B02 AN170 A-FS01 ALF-HI2
 4. ALS-A02 ALD-A02 ALF-A02 AN170 MT42 ALF-HI2

Function list

Evolution1			
Category	No.	Function	Standard / Optional
Enhanced Car Functions	1	Door reopen by following landing call at same landing	S
	2	Collective selective control	S
	3	Full-load non-stop	S
	4	Onward travel to the next stop in the case of a non-opening door	S
	5	Anti- nuisance "limit number of car call when empty load"	S
	6	Anti- nuisance "car call cancellation at terminal landing"	S
	7	Anti- nuisance "car call deletion opposite to travel direction"	S
	8	Adjustable waiting time for opening door at the main landing	S
	9	Adjustable speed and torque of door operator	S
	10	Re-leveling	S
	11	Energy saving operation for car light and fan	S
	12	Elevator start-up loading weighting compensation function	S
	13	In advance door open	0
	14	Changing fire landing	0
	15	Changing parking landing	0
	16	Changing main landing	0
	Safety and Emergency Functions	17	Main landing return
18		Prevents unintended movement of elevator cab	S
19		Landing to the nearest floor in case of problem (eg. motor overheat, car position missing)	S
20		Fire emergency return (FER)	S
21		Alarm button & Intercom button	S
22		Emergency car lighting	S
23		Overload protect	S
24		Repeat door closing in the event of lock failure	S
25		Safety curtain for door	S
26		Door overload protect	S
27		Parking (by key switch)	S
28		Phase failure and phase reversal protection	S
29		Lockable main switch integrated for controller cabinet	S
30		Emergency electrical operation	S
31		Inspection operation	S
32		Traction machine overheat supervision	S
33		Traction machine skidding protection	S
34		Prepared fire emergency return signal	S
35		Restrict the opening of the car door inside the car	S
36		Brake Torque Detection Function	S

Note: S – Standard 0 – Optional

Function list


Evolution1				
Category	No.	Function	Standard / Optional	
Safety and Emergency Functions	37	Emergency power operation (generator by customer)	S	
	38	Main COP attendance	0	
	39	Fireman service	0	
	40	Door lock bypass function	0	
	41	Automatic rescue operation	0	
	42	Earthquake function (sensors by customer)	0	
	43	Earthquake function (incl. sensors)	0	
	44	Top of car emergency exit	0	
	Trip Functions	45	Automatic doors	S
		46	Collective fault signal	S
47		Operation counting (trip and hour)	S	
48		Car priority	0	
Human Machine Interface	49	Door close button	S	
	50	Door open button	S	
	51	Car call cancellation (by double press)	S	
	52	Landing indicator of dot-matrix (red)	S	
	53	Car indicator of dot-matrix (red)	S	
	54	Landing indicator of 4.3" blue-white segment LCD	0	
	55	Car indicator of 5.7" blue-white segment LCD	0	
	56	Car arrival alarm	0	
	57	Second COP (excl. car attendant and intercom)	0	
	58	COP for disabled persons (no indicator, braille push buttons as standard)	0	
	59	Intercom system	S	
	60	Traveling cable (incl. video transmission function)	0	
	61	BAS interface function (dry contactor signal)	0	
	Monitoring and Tele-service	62	Color video camera (in car)	0
		63	Remote monitor interfacing (excl. MH2 board)	0
		64	Remote monitor interfacing (incl. MH2 board, without modem)	0
		65	Supervision panel (cable by other, cable length<=150m)	0
66		Build automation interfacing (RS232, MM board)	0	
67		Build automation interfacing (RS485, MMC board)	0	
68		Group control (max 8 units)	0	
Group / Duplex Control	69	Automatically allocate lower load elevator to response landing call in group	0	
	70	Continued group / duplex operation in case of failure of the other elevator	0	
	71	Taking units out of group (timer / switch)	0	

Note: S – Standard 0 – Optional




Layout

Shaft vertical section

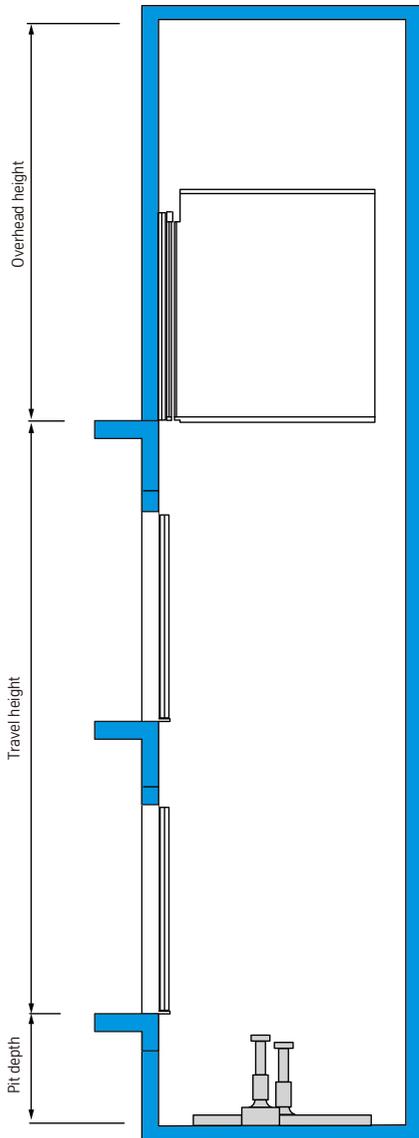

Lift plan

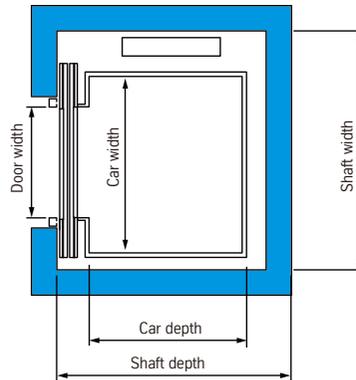

According to the elevator construction specification, the elevator shaft horizontal size is the minimum clearance by plumbing, and the allowed deviation as follows:

Shaft height	SH≤30m	30m<SH≤60m	60m<SH≤90m	90m<SH≤125m
Permitted deviation	0~+25mm	0~+35mm	0~+50mm	0~+80mm

Technical specifications (counter weight at side)

Evolution1						
Rated Load (kg)	Rated Speed (m/s)	Max. Travel Height (m)	Max. Number of Floors	Center Opening Door Size (DW x DH)(mm)	Car Size (CW x CD x HD)(mm)	Shaft Size (SW x SD)(mm)
630	1.0	50	17	800 x 2100	1100 x 1400 x 2400	1825x 1800
	1.5	75	26			
	1.6	75	26			
	1.75	90	31			
800	1.0	50	17	800 x 2100	1350 x 1400 x 2400	2050 x 1800
	1.5	75	26			
	1.6	75	26			
	1.75	90	31			
	2.0	110	32			
1000	1.0	50	17	900 x 2100	1600 x 1400 x 2400	2300 x 1800
	1.5	75	26			
	1.6	75	26			
	1.75	90	31			
	2.0	110	32			
1150	1.0	50	17	1100 x 2100	1800 x 1400 x 2400	2600 x 1800
	1.5	75	26			
	1.6	75	26			
	1.75	90	31			
	2.0	110	32			
1250	1.0	50	17	1100 x 2100	2000 x 1450 x 2400	2750 x 2050
	1.5	75	26			
	1.6	75	26			
	1.75	90	31			
	2.0	110	32			
1350	1.0	50	17	1100 x 2100	2000 x 1550 x 2400	2750 x 2050
	1.5	75	26			
	1.6	75	26			
	1.75	90	31			
	2.0	110	32			
1600	1.0	50	17	1100 x 2100	2000 x 1750 x 2400	2750 x 2250
	1.5	75	26			
	1.6	75	26			
	1.75	90	31			
	2.0	110	32			

Min. Overhead height & Min. Pit depth

Rated Speed (m/s)	Min. Overhead Height (mm)			Min. Pit Depth (mm)			
	630kg	800-1150kg	1250-1600kg	630kg	800-1000kg	1150kg	1250-1600kg
1.0	3850	3850	4200	1300	1300	1200	1550
1.5	4000	4000	4350	1450	1450	1450	1550
1.6	4000	4000	4350	1450	1450	1450	1600
1.75	4050	4050	4450	1550	1550	1550	1750
2.0	/	4250	4450	/	1600	1600	1750